




## Sandwich Bearing Q

Reinforced elastomeric bearing

For the following applications  

### Feature

Level out any unevenness in the bearing surfaces during the initial load phase | Ready for installation | Maintenance free | Durable

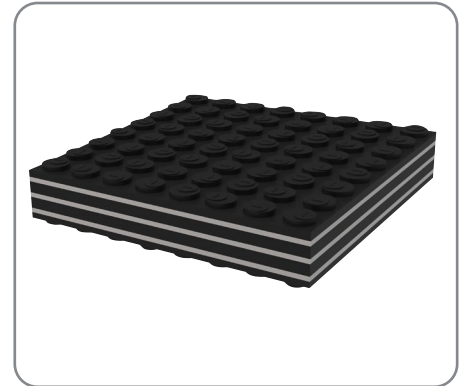

Sandwich Bearing Q	Steel reinforced elastomeric bearing with a transverse tensile reinforcement of weather resistant steel
Material	Ageing resistant CR material
Material properties	Weather and ozone resistant
Hardness	70 ± 5 Shore A
Fields of application	This bearing is used in all areas of construction as permanently elastic articulating connection element. It is also used for highly loaded components in the bearing area.
Mounting/Installation	Prior to installation, it must be ensured that the elastomer bearings and bearing surfaces are free of dirt, ice, snow, grease, solvents, oils or separating agents. In in-situ concrete construction the bearing joints must be filled and covered so that no concrete slurry can penetrate them. The spring effect of the bearing must be guaranteed.

### Product performance

Compressive stress  
 $\sigma_{R,d} = 28 \text{ N/mm}^2$  (format-independent)

Angular rotation  
 $\alpha_{max} = 40 \text{ ‰}$

Shear deformation  
 $u_{max} = 20 \text{ mm}$

Official Approval (DIBt Berlin)  
 Z-16.33-480

Thicknesses  
 10, 20, 30 and 40 mm


Federal Chancellery of Berlin (DE)



State Theatre, Stuttgart (DE)



Opera House, Wenzhou (CN)



Stadium Lech Poznan (PL)



Lia-Manoliu Stadium, Bucharest (RO)



The contents of this publication are the result of many years of research and experience gained in the application of this technology. All information is given in good faith; it does not represent a guarantee with respect to characteristics and does not exempt the user from testing the suitability of products and from ascertaining that the industrial property rights of third parties are not violated. No liability whatsoever will be accepted for damage – regardless of its nature and its legal basis – arising from advice given in this publication. We reserve the right to make technical modifications in the course of product development.