





Productinfo

HEIM Slide Sheets series GV *with PTFE-layer*

Typelist

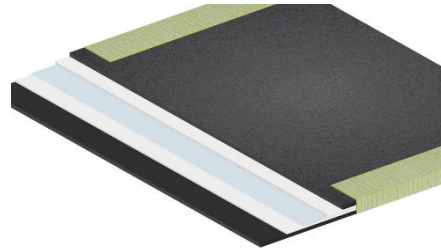

- Permissible load up to 7 N/mm²
- High-quality sliding-greases for temporary horizontal deformation

Type	Setup	Range of application
GV	 <p>High strenght sliding foils with PTFE sliding insert; No elastomeric lamination; Friction coefficient μ between 0,02 and 0,10</p>	Point-, strip- and area sliding-bearing for higher loads. Maximum average compresseion: 7 N/mm ² Temperature range: -30 °C up to +70 °C
GVN	 <p>High strenght sliding foils with PTFE sliding insert; One side elastomeric lamination; Friction coefficient μ between 0,02 and 0,10</p>	Point-, strip- and area sliding-bearing for higher loads. Maximum average compresseion: 7 N/mm ² Temperature range: -30 °C up to +70 °C
GVNN	 <p>High strenght sliding foils with PTFE sliding insert; Both side elastomeric lamination; Friction coefficient μ between 0,02 and 0,10</p>	Point-, strip- and area sliding-bearing for higher loads. Maximum average compresseion: 7 N/mm ² Temperature range: -30 °C up to +70 °C

The effective sliding coefficient is depending on external influences like evenness of the concrete and the surrounding temperature.

Thickness tolerance = +- 0,5 mm

Materialdickenangaben gerundet = Dickentoleranz $\pm 0,5$ mm